



GB2004/001057




INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

BEST AVAILABLE COPY

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED  
BUT NOT IN COMPLIANCE WITH  
RULE 17.1(a) OR (b)




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

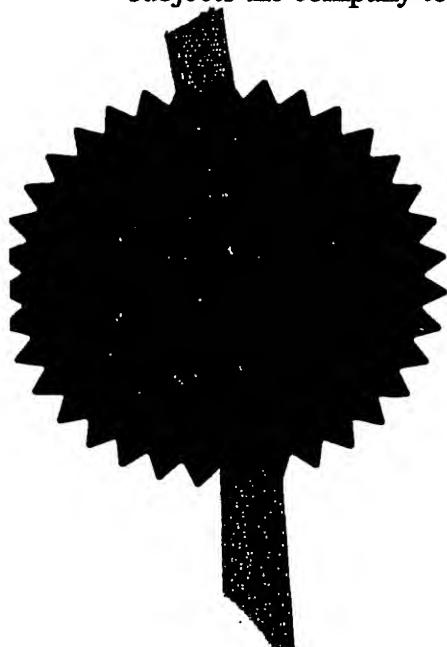


Signed

*Stephen Hendley*

Dated

25 March 2004

Patents 1977  
16)

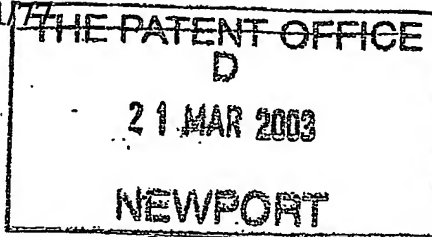

The Patent Office

21MAR03 E794649-1 000314  
P01/7700 0.00-0306482.1

The Patent Office  
Cardiff Road  
Newport  
Gwent NP10 8QQ

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

21 MAR 2003

1. Your reference	P/63803.GBA		
2. Patent application number (The Patent Office will fill in this part)	0306482.1		
3. Full name, address and postcode of the or of each applicant (underline all surnames)	Marconi Communications Limited P O Box 53 New Century Park Coventry CV3 1HJ  Patents ADP number (if you know it) 7894538001  If the applicant is a corporate body, give the country/state of its incorporation ENGLAND		
4. Title of the invention	"Preventing Damage to Optical Components from Optical Time Domain Reflectometers"		
5. Name of your agent (if you have one)	Rosi Armstrong		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	Marconi Intellectual Property Marrable House The Vineyards Great Baddow Chelmsford Essex CM2 7QS  Patents ADP number (if you know it) 40527004 787 3300002		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body See note (d))	YES		

BEST AVAILABLE COPY

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form 0

Description 9

Claim(s) 4

Abstract 1

Drawing(s) 1

10. If you are also filing any of the following, state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 0

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 0

Any other documents  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

Rosi Armstrong  
ROSI ARMSTRONG

19 March 2003

12. Name and daytime telephone number of person to contact in the United Kingdom  
Rosi Armstrong  
024 76 56 3618

#### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

#### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

BEST AVAILABLE COPY

PREVENTING DAMAGE TO OPTICAL COMPONENTS FROM OPTICAL TIME  
DOMAIN REFLECTOMETERS

BEST AVAILABLE COPY

This invention relates to preventing damage to optical components from optical time domain reflectometers (OTDRs), particularly when these are used to test optical fibre cables to which optical components are connected.

5 OTDRs are commonly used to test optical fibre cables, to identify whether there are any imperfections in a cable, particularly a break, and where any imperfections have occurred. OTDRs generally comprise a transmitter which emits OTDR signals into a cable, and a receiver which looks for echos of the OTDR signals reflected from any imperfections in the cable. For example, to look for a suspected break in a cable, an  
10 OTDR is inserted into the cable at a convenient junction thereof. The break may lie on either side of the junction. OTDR signals are therefore emitted into the cable in a first direction from the junction, and then in a second, opposite direction from the junction, and in each case echos of the OTDR signals looked for. Such echos will be received from the cable on one side of the junction, and this will indicate where the break in the  
15 cable has occurred.

A problem can arise when looking for a break in a cable, if an OTDR is used near the end of the cable, to which an optical component is connected. If the break does not lie between the OTDR and the end of the cable, then the OTDR signals emitted by the  
20 OTDR will be applied to the optical component. The OTDR signals are in the form of a series of short, high power pulses, and the peak power of the pulses can typically be

around 20dBm. Depending on the nature of the component, receipt of such OTDR signals can result in damage to the component. For example, the optical component may comprise an optical receiver. Such receivers are designed to be highly sensitive to optical signals, and generally do not tolerate high power levels without damage. It is  
5 therefore desirable to prevent such optical components from receiving OTDR signals from an OTDR.

According to the invention there is provided in a telecommunications network comprising an optical fibre cable, and an optical component connected to a first point of  
10 the optical fibre cable, with an optical time domain reflectometer (OTDR) connected to a second point of the optical fibre cable so that it can emit OTDR signals along the optical fibre cable towards the optical component,  
a method of preventing OTDR signals from being applied to the optical component, comprising  
15 introducing one or more optical signals into the optical fibre cable at the first point thereof,  
using the optical fibre cable to carry the optical signals to the second point thereof, and  
configuring the OTDR to detect the or each optical signal from the optical fibre cable  
and to prevent emission of ODTR signals at any time during which detection of an  
20 optical signal occurs.

When there is no break in the optical fibre cable between the first point and the second point, optical signals will be received by the OTDR. This prevents emission of OTDR signals, so no such signals will be applied to the optical component and damage thereto

is avoided. When there is a break in the optical fibre cable between the first point and the second point, no optical signals will be received by the OTDR. This will then emit OTDR signals, and echos of the OTDR signals will be reflected back from the break, and its presence and position can be confirmed/determined. As there is a break in the cable, the OTDR signals do not reach the optical component, and no damage is caused to it. The method therefore provides a system for preventing damage to optical components from OTDRs, when these are used to test for breaks in optical fibre cables.

The optical component may comprise an optical receiver, and introducing one or more optical signals into the optical fibre cable at the first point thereof may comprise arranging the optical receiver to introduce one or more optical signals into the optical fibre cable. This may be achieved by, for example, providing the optical receiver with a transmitting device, and transmitting one or more optical signals from the transmitting device into the optical fibre cable. The or each optical signal may be carried along the optical fibre cable in a direction opposite to that of traffic signals which would normally be transmitted along the optical fibre cable and received by the optical receiver. The optical receiver may comprise an avalanche photodiode or a PIN diode.

The optical component may comprise a receive erbium doped fibre amplifier (EDFA), and introducing one or more optical signals into the optical fibre cable at the first point thereof may comprise arranging the receive EDFA to introduce one or more optical signals into the optical fibre cable. This may be achieved by, for example, controlling the isolation of an input isolator of the receive EDFA such that, in the absence of an input signal thereto, one or more optical signals in the form of ASE noise escapes from

the input of the receive EDFA and is introduced into the optical fibre cable. The or each optical signal may be carried along the optical fibre cable in a direction opposite to that of traffic signals which would normally be transmitted along the optical fibre cable and received by the receive EDFA. The receive EDFA may be provided as part of an optical receiver. Preventing OTDR signals from being applied to the receive EDFA will prevent such signals being applied to the optical receiver, and damage to the optical receiver is thereby avoided.

Introducing one or more optical signals into the optical fibre cable at the first point thereof may comprise superimposing one or more optical signals onto the optical fibre cable. This may be achieved by multiplexing one or more optical signals onto the optical fibre cable, for example using a wavelength division multiplexor (WDM) or a tap coupler. The or each optical signal may be carried along the optical fibre cable in a direction opposite to or the same as that of traffic signals which would normally be transmitted along the optical fibre cable. The or each optical signal may comprise a pilot signal. The or each pilot signal may be a continuous signal or a modulated signal. The or each pilot signal may have a wavelength different to that of traffic signals which would normally be transmitted along the optical fibre cable, e.g. 1310nm or 1510nm.

Introducing one or more optical signals into the optical fibre cable at the first point thereof may comprise superimposing one or more optical service channel (OSC) optical signals onto the optical fibre cable. This may be achieved by multiplexing one or more OSC optical signals onto the optical fibre cable, for example using a WDM or a tap coupler. The or each OSC optical signal may be carried along the optical fibre cable in

a direction opposite to or the same as that of traffic signals which would normally be transmitted along the optical fibre cable. The or each OSC optical signal may have a wavelength of approximately 1510nm.

- 5 The OTDR may comprise a transmitter. The OTDR transmitter may be used to emit OTDR signals, for example along an optical fibre cable. The OTDR transmitter may be disabled to prevent emission of ODTR signals at any time during which detection of an optical signal occurs. The OTDR may comprise a detector. The OTDR detector may be used to detect the or each optical signal from the optical fibre cable. The OTDR
- 10 detector may be able to detect optical signals in a wavelength range of approximately 1250nm to approximately 1700nm. The OTDR detector may be used to receive echos of OTDR signals, for example reflected from any imperfections in an optical fibre cable. Alternatively, the OTDR may comprise a receiver. The OTDR receiver may be used to receive echos of OTDR signals, for example reflected from any imperfections in
- 15 an optical fibre cable.

Embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings, in which :

- 20 Figure 1 is a schematic representation of a first embodiment of a telecommunications network in which the method of the invention is used,

Figure 2 is a schematic representation of a second embodiment of a telecommunications network in which the method of the invention is used, and



Figure 3 is a schematic representation of a third embodiment of a telecommunications network in which the method of the invention is used.

Figure 1 shows a telecommunications network 1, comprising an optical fibre cable 2, an  
5 optical component 3 connected to a first point 4 of the optical fibre cable 2, and an  
optical time domain reflectometer (OTDR) 5 connected to a second point 6 of the  
optical fibre cable 2. The optical component 3 comprises an optical receiver, which  
includes a transmitting device. The transmitting device transmits optical signals into the  
optical fibre cable 2 at the first point 4. The optical signals are carried along the optical  
10 fibre cable 2, to the second point 6 thereof. The optical signals are carried in a direction  
opposite to that of traffic signals which are normally transmitted along the optical fibre  
cable 2 and received by the optical receiver 3. The OTDR 5 comprises a transmitter  
used to emit OTDR signals, and a receiver used to receive echos of the OTDR signals.  
The OTDR receiver also detects the optical signals from the transmitting device of the  
15 optical receiver 3 carried along the optical fibre cable 2. At any time during which  
detection of an optical signal occurs, the OTDR transmitter is disabled to prevent  
emission of ODTR signals along the optical fibre cable 2.

The above arrangement can be used to test for a break in the optical fibre cable 2.  
20 When there is no break in the optical fibre cable 2 between the first point 4 and the  
second point 6, optical signals will be received by the OTDR 5 from the transmitting  
device of the optical receiver 3. This will prevent emission of OTDR signals, so no  
such signals will be applied to the optical receiver 3 and damage thereto is avoided.  
When there is a break in the optical fibre cable 2 between the first point 4 and the

second point 6, no optical signals will be received by the OTDR 5. This will then emit OTDR signals, and echos of the OTDR signals will be reflected back from the break, and its presence and position can be confirmed/determined. As there is a break in the optical fibre cable 2, the OTDR signals do not reach the optical receiver 3, and no  
5 damage is caused to it.

Figure 2 shows a telecommunications network 10, comprising an optical fibre cable 20, an optical component 30 connected to a first point 40 of the optical fibre cable 20, and an optical time domain reflectometer (OTDR) 50 connected to a second point 60 of the  
10 optical fibre cable 20. The optical component 30 comprises an optical receiver, which is provided with a receive erbium doped fibre amplifier (EDFA) 70 through which the optical receiver 30 is connected to the first point 40 of the optical fibre cable 20. The EDFA 70 is controlled such that, in the absence of an input signal thereto, its input isolator allows optical signals in the form of ASE noise to escape from the input of the  
15 EDFA 70. These optical signals are introduced into the optical fibre cable at the first point 40. The optical signals are carried along the optical fibre cable 20, to the second point 60 thereof. The optical signals are carried in a direction opposite to that of traffic signals which are normally transmitted along the optical fibre cable 20 and received by the optical receiver 30. The OTDR 50 comprises a transmitter used to emit OTDR  
20 signals, and a receiver used to receive echos of the OTDR signals. The OTDR receiver also detects the optical signals from the receive EDFA 70 of the optical receiver 30 carried along the optical fibre cable 20. At any time during which detection of an optical signal occurs, the OTDR transmitter is disabled to prevent emission of ODTR signals along the optical fibre cable 20.

The above arrangement can be used to test for a break in the optical fibre cable 20. When there is no break in the optical fibre cable 20 between the first point 40 and the second point 60, optical signals will be received by the OTDR 50 from the receive EDFA 70 of the optical receiver 30. This will prevent emission of OTDR signals, so no such signals will be applied to the receive EDFA 70 and the optical receiver 30 and damage to the optical receiver is avoided. When there is a break in the optical fibre cable 20 between the first point 40 and the second point 60, no optical signals will be received by the OTDR 50. This will then emit OTDR signals, and echos of the OTDR signals will be reflected back from the break, and its presence and position can be confirmed/determined. As there is a break in the optical fibre cable 20, the OTDR signals do not reach the receive EDFA 70 and the optical receiver 30, and no damage is caused to the optical receiver.

Figure 3 shows a telecommunications network 100, comprising an optical fibre cable 200, and an optical component 300, with an optical time domain reflectometer (OTDR) 500 connected to a point 600 of the optical fibre cable 200. The optical component 300 comprises an optical receiver. The telecommunications network 100 further comprises a wavelength division multiplexor (WDM) 700, connected to the optical fibre cable 200 and to the optical receiver 300, as shown. Optical signals are superimposed onto the optical fibre cable 200 by multiplexing the optical signals onto the optical fibre cable using the WDM 700. The optical signals have a wavelength, e.g. 1310nm, different to that of traffic signals which are normally transmitted along the optical fibre cable 200 to the optical receiver 300. The optical signals are carried along the optical fibre cable 200, in the opposite direction as the traffic signals, to the point 600 thereof. The OTDR

500 comprises a transmitter used to emit OTDR signals, and a receiver used to receive echos of the OTDR signals. The OTDR receiver also detects the optical signals from the WDM 700 carried along the optical fibre cable 200. At any time during which detection of an optical signal occurs, the OTDR transmitter is disabled to prevent  
5 emission of ODTR signals along the optical fibre cable 200.

The above arrangement can be used to test for a break in the optical fibre cable 200. When there is no break in the optical fibre cable 200 between the point 600 and the WDM 700, optical signals will be received by the OTDR 500 from the WDM 700. This  
10 will prevent emission of OTDR signals, so no such signals will be applied to the optical receiver 300 and damage to this is avoided. When there is a break in the optical fibre cable 200 between the point 600 and the WDM 700, no optical signals will be received by the OTDR 500. This will then emit OTDR signals, and echos of the OTDR signals will be reflected back from the break, and its presence and position can be  
15 confirmed/determined. As there is a break in the optical fibre cable 200, the OTDR signals do not reach the optical receiver 300, and no damage is caused to this.

CLAIMS

1. In a telecommunications network comprising an optical fibre cable, and an optical component connected to a first point of the optical fibre cable, with an optical time domain reflectometer (OTDR) connected to a second point of the optical fibre cable so that it can emit OTDR signals along the optical fibre cable towards the optical component,  
a method of preventing OTDR signals from being applied to the optical component, comprising  
introducing one or more optical signals into the optical fibre cable at the first point thereof,  
using the optical fibre cable to carry the optical signals to the second point thereof, and  
configuring the OTDR to detect the or each optical signal from the optical fibre cable and to prevent emission of ODTR signals at any time during which detection of an optical signal occurs.
2. A method according to claim 1, in which the optical component comprises an optical receiver, and introducing one or more optical signals into the optical fibre cable at the first point thereof comprises arranging the optical receiver to introduce one or more optical signals into the optical fibre cable.
3. A method according to claim 2, in which arranging the optical receiver to introduce one or more optical signals into the optical fibre cable is achieved by

providing the optical receiver with a transmitting device, and transmitting one or more optical signals from the transmitting device into the optical fibre cable.

4. A method according to any preceding claim, in which the optical component comprises a receive erbium doped fibre amplifier (EDFA), and introducing one or more optical signals into the optical fibre cable at the first point thereof comprises arranging the receive EDFA to introduce one or more optical signals into the optical fibre cable.
5. A method according to claim 4, in which arranging the receive EDFA to introduce one or more optical signals into the optical fibre cable is achieved by controlling the isolation of an input isolator of the receive EDFA such that, in the absence of an input signal thereto, one or more optical signals in the form of ASE noise escapes from the input of the receive EDFA and is introduced into the optical fibre cable.
6. A method according to claim 1, in which introducing one or more optical signals into the optical fibre cable at the first point thereof comprises superimposing one or more optical signals onto the optical fibre cable.
7. A method according to claim 6, in which superimposing one or more optical signals onto the optical fibre cable is achieved by multiplexing one or more optical signals onto the optical fibre cable.

8. A method according to claim 7, in which the or each optical signal comprises a pilot signal, and the or each pilot signal has a wavelength different to that of traffic signals which would normally be transmitted along the optical fibre cable.
9. A method according to claim 1, in which introducing one or more optical signals into the optical fibre cable at the first point thereof comprises superimposing one or more optical service channel (OSC) optical signals onto the optical fibre cable.
10. A method according to claim 9, in which superimposing one or more OSC optical signals onto the optical fibre cable is achieved by multiplexing one or more OSC optical signals onto the optical fibre cable.
11. A method according to any preceding claim, in which the OTDR comprises a transmitter, used to emit OTDR signals.
12. A method according to claim 11, in which the OTDR transmitter is disabled to prevent emission of ODTR signals at any time during which detection of an optical signal occurs.
13. A method according to any preceding claim, in which the OTDR comprises a detector, used to detect the or each optical signal from the optical fibre cable.

14. A method according to claim 13, in which the OTDR detector is able to detect optical signals in a wavelength range of approximately 1250nm to approximately 1700nm.
15. A method according to claim 13 or claim 14, in which the OTDR detector is used to receive echos of OTDR signals.
16. A method according to any of claims 1 to 12, in which the OTDR comprises a receiver used to receive echos of OTDR signals.
17. A method substantially as described herein with reference to Figure 1 of the accompanying drawings.
18. A method substantially as described herein with reference to Figure 2 of the accompanying drawings.
19. A method substantially as described herein with reference to Figure 3 of the accompanying drawings.






ABSTRACTPREVENTING DAMAGE TO OPTICAL COMPONENTS FROM OPTICAL TIME  
DOMAIN REFLECTOMETERS

There is provided in a telecommunications network (1) comprising an optical fibre cable (2), and an optical component (3) connected to a first point (4) of the optical fibre cable, with an optical time domain reflectometer (OTDR) (5) connected to a second point (6) of the optical fibre cable so that it can emit OTDR signals along the optical fibre cable towards the optical component, a method of preventing OTDR signals from being applied to the optical component, comprising introducing one or more optical signals into the optical fibre cable at the first point thereof, using the optical fibre cable to carry the optical signals to the second point thereof, and configuring the OTDR to detect the or each optical signal from the optical fibre cable and to prevent emission of ODTR signals at any time during which detection of an optical signal occurs.

The optical component may comprise, for example, an optical receiver which may introduce the optical signals into the optical fibre cable. Alternatively, introducing one or more optical signals into the optical fibre cable may comprise superimposing one or more optical signals onto the optical fibre cable. The OTDR (4) may comprise a detector, used to detect the or each optical signal from the optical fibre cable. The OTDR may comprise a transmitter, used to emit OTDR signals, and disabled to prevent emission of ODTR signals at any time during which detection of an optical signal occurs.

To be accompanied on publication by Figure 1 of the accompanying drawings.

BEST AVAILABLE COPY

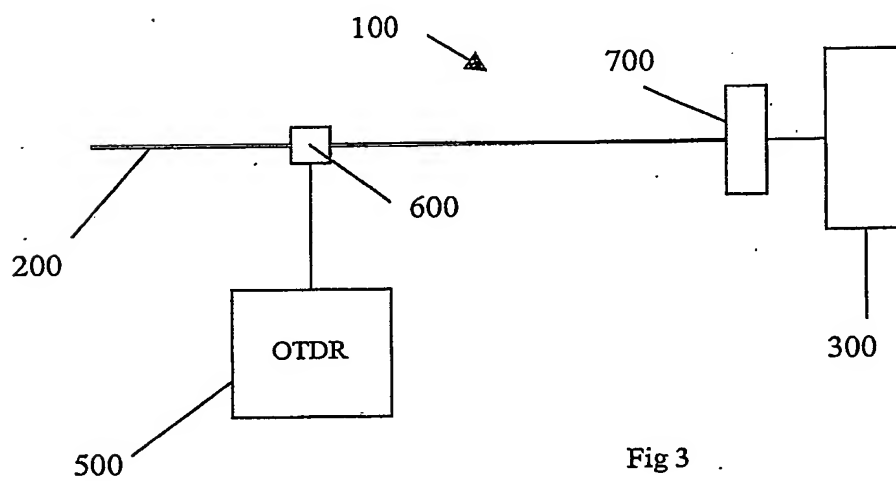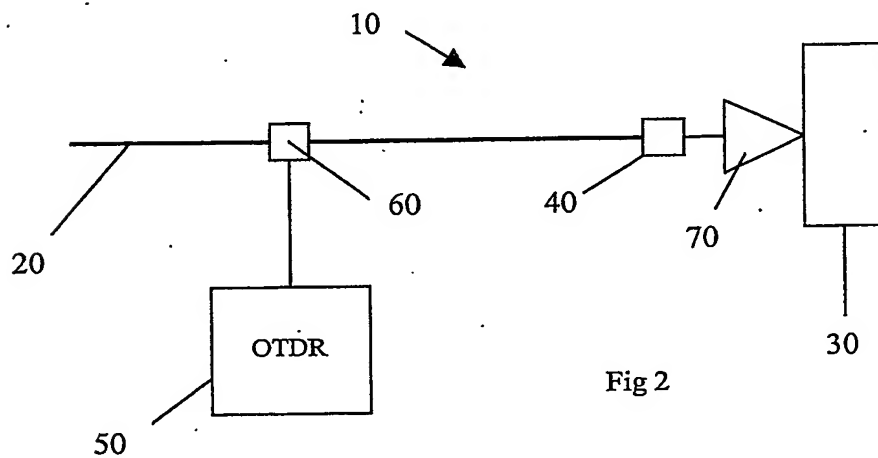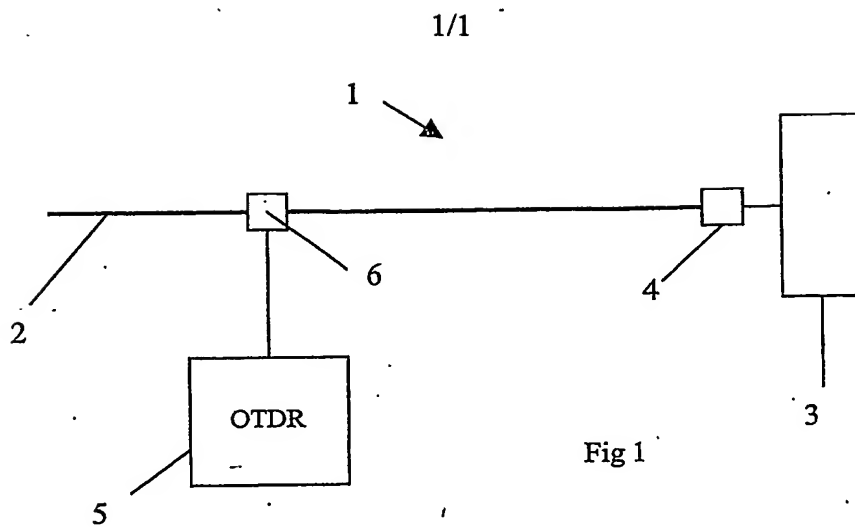

**BEST AVAILABLE COPY**

**PCT/GB2004/001057**

